


# FAS2720 Tech specs

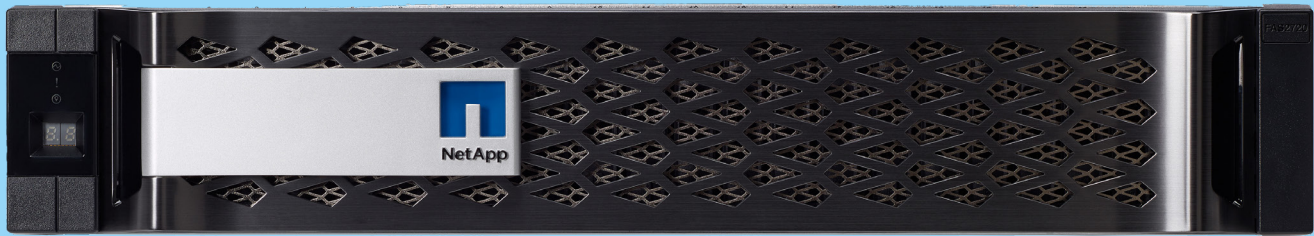

	FAS2720
Maximum raw capacity per HA pair	1440TB
Maximum drives per HA pair	144
NAS scale-out	1-24 nodes (12 HA pairs)
SAN scale-out	1-12 nodes (6 HA pairs)
Maximum raw capacity for cluster	17PB
Controller chassis form factor	2U / 12 internal drives
OS version	ONTAP 9.4 RC1 and later
Storage protocols supported	FC, FCoE, iSCSI, NFS, pNFS, CIFS/SMB, Amazon S3
Shelves and media	<u><a href="#">See NetApp.com for current information.</a></u>

Table 1) NetApp FAS technical specifications

**Note:** All HA pair specifications are for dual controller, active-active configurations.

<sup>1</sup> Maximum raw capacity depends on the drive offerings. See the Shelves and Media page on NetApp.com for current information.



+1 877 263 8277