



NetApp®



## Datasheet

# NetApp Flash Cache

Optimize the performance of your storage system without adding disk drives. Grow while conserving power, cooling, and space.

### KEY BENEFITS

#### Optimize Performance

The NetApp® Flash Cache™ modules improve performance for workloads that are random read intensive without adding more high-performance disk drives.

#### Reduce Latency, Improve Throughput

Speed access to your data with these intelligent read caches, which can reduce latency by a factor of 10 or more compared to hard disk drives. Lower latency can translate into more throughput for random I/O workloads.

#### Save Storage, Power, and Space

Use our Flash Cache modules instead of extra disk drives to provide I/O throughput. Our solid-state Flash Cache modules use no additional rack space and consume 95% less power than a shelf of 15k RPM disk drives.

### The Challenge

**Provide the storage performance needed to meet application SLOs while cutting costs**

The cost of delivering IT services is under more pressure than ever. Hard constraints on budget and staff collide with expectations for more and better.

Networked storage systems are a case in point. Providing enough capacity is easy. Keeping pace with performance demands can be difficult because, while they are getting bigger, disk drives aren't getting any faster.

As a result, large numbers of “short-stroked” disk drives are commonly used to deliver the I/O throughput demanded by many workloads. This approach wastes storage capacity, rack space, and electricity.

Flash Cache is a key component of the NetApp Virtual Storage Tier (VST), which allows you to optimize performance and reduce costs without increasing complexity.

### The Solution

**The NetApp Flash Cache modules give you a new way to optimize performance**

We created these intelligent read caches so you can reduce latency and improve I/O throughput without adding more high-performance disk drives. Use Flash Cache modules to improve performance for workloads that are random read intensive such as file services, messaging, OLTP databases, and server/desktop virtualization.

You can also use Flash Cache in combination with capacity-optimized drives for many workloads to increase storage capacity without compromising performance.

You can configure up to 16TB of read cache in a storage system using Flash Cache cards. The ability to cache large quantities of active data makes Flash Cache cards effective across a broad set of workloads.

#### Automatically put Active Data where Access will be Fast

Our Flash Cache modules put your active data blocks in the storage controller, speeding access by a factor of 10 or better compared to disk.

Flash Cache modules give you the performance of flash technology without creating another storage tier.

Because Flash Cache is based on VST, hot data blocks are promoted to flash automatically without the need for complex tiering policies.

You can tune Flash Cache to match your specific workload by using software settings that let you choose from three modes of operation.

You can also give caching priority to your most important volumes and LUNs when the load is heaviest by using our quality of service software in combination with Flash Cache modules.

### Reduce Costs for Storage, Power, and Rack Space

Using an industry standard benchmark<sup>1</sup>, we demonstrated that Flash Cache can eliminate up to 75% of the disk drives in a storage system with no change

to I/O throughput and with better response times.

We also switched from 15k RPM Fibre Channel drives to fewer, capacity-optimized drives with Flash Cache in these tests. The combination of capacity-optimized drives with Flash Cache cards increased storage capacity by 50% while providing comparable performance.

By eliminating disk drives not needed for storage capacity, Flash Cache modules can reduce the purchase price of a storage system and can provide ongoing savings by consuming less power, cooling, and rack space.

### Predict Your Results

You can use a software feature of the Data ONTAP® operating system to


determine whether the performance of your storage system will improve with the addition of one or more caching modules. Predictive Cache Statistics generate data that indicates whether caching modules will help and how much additional cache is optimal for your workload.

1. SPECsfs2008\_nfs.v3. Visit <http://spec.org/sfs2008/results/sfs2008nfs.html> for more information.

### About NetApp

NetApp creates innovative storage and data management solutions that deliver outstanding cost efficiency and accelerate business breakthroughs. Discover our passion for helping companies around the world go further, faster at [www.netapp.com](http://www.netapp.com).

Go further, faster®

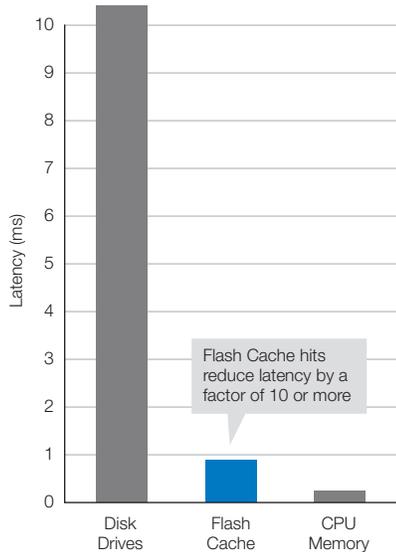

Latency is typically 10ms or higher when accessing data from disk drives. Flash Cache modules reduce latency by a factor of 10 or more compared to disk drives when there is a cache hit.

Figure 1) Latency reduction.

### MAXIMUM MODULES, ADDED READ CACHE PER HA SYSTEM<sup>1</sup>

	FLASH CACHE 256GB	FLASH CACHE 512GB	FLASH CACHE 1TB
FAS6280, V6280, FAS6290, V6290	—	16 modules 8TB	16 modules 16TB
FAS6240, V6240, FAS6250, V6250	—	12 modules 6TB	6 modules 6TB
FAS6070, V6070, FAS6080, V6080	—	8 modules 4TB	—
FAS6210, V6210, FAS6220, V6220	—	6 modules 3TB	2 modules 2TB
FAS3250, V3250, FAS3270, V3270	—	4 modules 2TB	2 modules 2TB
FAS3170, V3170, FAS6040, V6040	—	4 modules 2TB	—
FAS3220, V3220	—	2 modules 1TB	—
FAS3240, V3240	4 modules 1TB	2 modules 1TB	—
FAS3070, V3070, FAS3160, V3160	4 modules 1TB	—	—
FAS3140, V3140, FAS3210, V3210 <sup>2</sup>	2 modules 512GB	—	—

1 These specifications are for a dual-controller, high-availability (HA) system. Divide numbers by 2 to get maximums for a single-controller configuration.

2 Flash Cache is not supported with Data ONTAP 8.1.0 (and later releases) running on the FAS/V3210 and FAS/V3140 systems.

Table 1) Supported systems and configurations.



[www.netapp.com](http://www.netapp.com)

© 2013 NetApp, Inc. All rights reserved. No portions of this document may be reproduced without prior written consent of NetApp, Inc. Specifications are subject to change without notice. NetApp, the NetApp logo, Go further, faster, Data ONTAP, and Flex Cache are trademarks or registered trademarks of NetApp, Inc. in the United States and/or other countries. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such. DS-2811-0513

Follow us on:

